




# Vantage Metal Works, Inc.

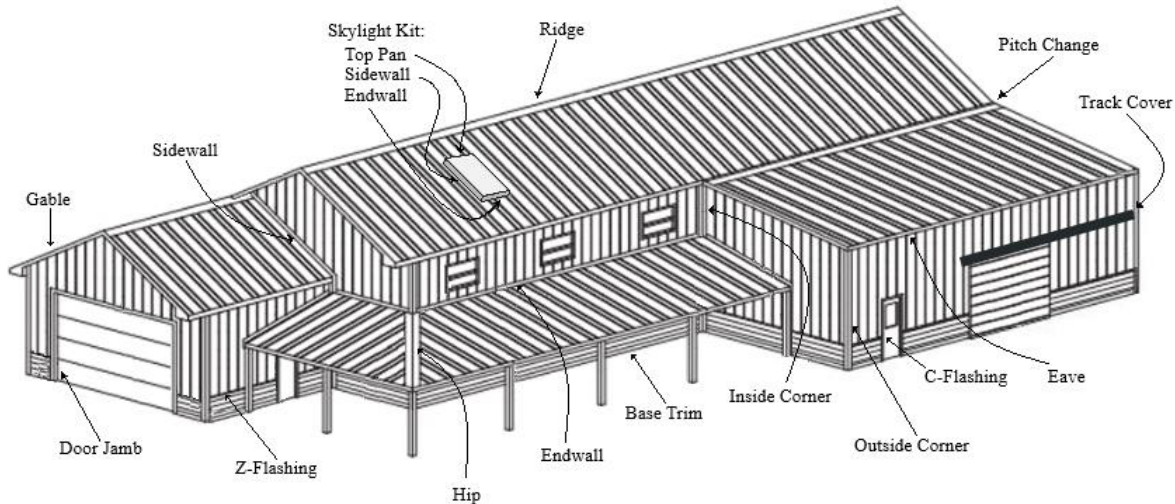

## EXPOSED FASTENER PANEL – BASIC INFORMATION

### **Ratings & Load Data:**

Fire Resistance: UL 263, 790 Fire Tests  
 Uplift Resistance: UL 580 Wind Uplift  
 Impact Resistance: UL 2218 Impact Resistance

### **Applications:**

Agricultural, Light Industrial, and Residential

### **Finishes & Substrates:**

Finishes 29 ga: 20 standard SMP colors, Galvanized and Galvalume®  
 Finishes 26 ga: 14 standard SMP colors, Galvanized and Galvalume®  
 Limited 40-year paint warranty  
 Corrosion Protection on Substrate:  
 AZ-50 (ASTM A792) for painted Galvalume®  
 AZ-55 (ASTM A792) for unpainted, acrylic coated Galvalume®  
 G-60 (ASTM A653) for painted Galvanized  
 G-90 (ASTM A653) for unpainted, acrylic coated Galvanized

### **Available lengths:**

2'6" to 45'-0" in 1/4" increments  
 (cut charge for panels under 2'6")

### **Light Panels:**

Polycarbonate panels available in  
 Clear and Soft-White.

### **Recommended Fasteners:**

Fasten Panel to Lumber with #10-14 Sharp Point Wood Screw  
 Fasten Panel to Plywood and OSB with #14-10 Type S Wood Screw  
 Fasten Panel to Steel with #12-14 Drill-Tip Metal-to-Metal Screw  
 Screw tip should protrude no less than 1/4" through the underlayment